

CERAKOTE[®]



THE UNRIVALED LEADER IN
THIN-FILM PROTECTIVE COATINGS

Cerakote is a ceramic polymer based proprietary formulation that offers industry leading durability, hardness, scratch resistance, corrosion resistance, flexibility, heat and chemical resistance. Cerakote can be applied to most substrates including metals, plastics, polymers, composites, hydrographics and PVD.

FINISH STRONG[™]

CERAKOTE.COM

CERAKOTE®

WE ARE the most respected brand in the world that formulates and manufactures proprietary thin film coatings for customers who demand the highest performance to achieve protection, customization, and/or restoration.

WE ARE elite creators and advocates who set the standard and strive to outperform it. We want to be the perfect finish.

WE ARE deliberate and continuously analyzing, improving, and implementing. Our goal is to make the finish matter. Come, make your statement.

WE ARE innovative, offering unrivaled advantages. There is nothing else like Cerakote. We measure success through applicator growth.

WE INSPIRE, create, and drive demand for distinct premium attributes with Cerakote quality.

WITH A STRONG industry-leading reputation there is pride of ownership. You can't deny our unstoppable momentum.

CERAKOTE

Never Settle. Finish Strong.

PRODUCT SERIES GUIDE


ELITE SERIES

Our Highest Performance Thin Film Coating

Oven Cure
9+ Colors

Common Uses: Firearms, knives, eyewear, consumer electronics, salt water applications, valves, and more.

Attributes:

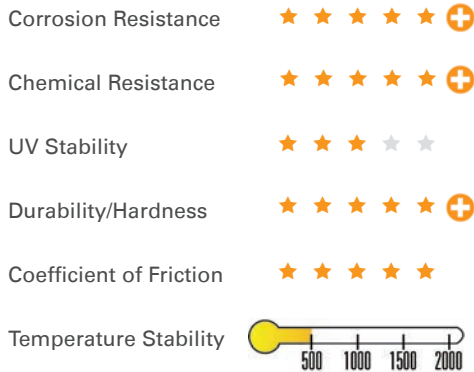

- See Page 3 -


H SERIES

The World's Leading Thin Film Coating

Oven Cure
100+ Colors

Common Uses: Firearms, eyewear, consumer electronics, salt water applications, valves, and more.

Attributes:

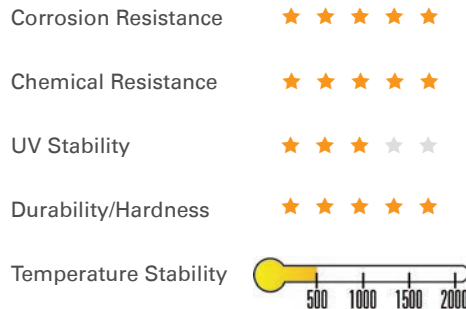

- See Page 4 -


HIGH TEMP

The Thinnest, Most Durable High Temperature Ceramic Coatings in the World

Air & Oven Cure
12+ Colors

Common Uses: Barrels, suppressors, exhaust, heat exchangers, industrial, automotive components, and more.

Attributes:

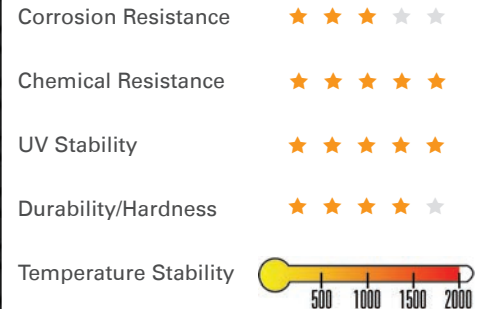

- See Page 5 -

GEN II NiR

The Next Generation of Visual and Near-Infrared Signature Management Coatings

Oven Cure
8+ Colors

Common Uses: Firearms, eyewear, consumer electronics, salt water applications, valves, and more.

Attributes:



**Available to Military and Law Enforcement Agencies Only.*

- See Page 6 -


CLEARs

The World's Strongest Clear Coatings

Air & Oven Cure

Common Uses: Architectural Cladding, Aluminum, Steel, Stainless Steel, Composites, Plastics, PVD, Hydrographics, and more.

Attributes:

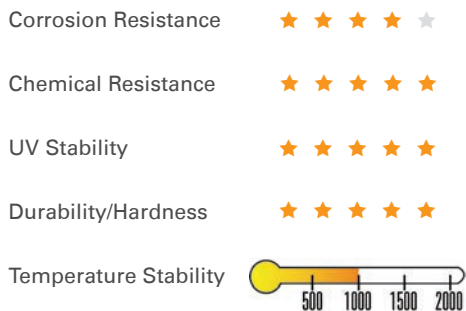

- See Pages 7 & 8 -

SPECIALTY

Products Designed with Specific Performance Attributes

Air & Oven Cure

Each Specialty Coating has been designed with specific performance attributes while maintaining the industry leading physical and chemical performance of Cerakote in a single coat, thin film coating.

Coatings:

- H-900 Electrical Barrier
- C-110 Micro Slick
- C-186 & V-136 Piston Coatings
- HIR-Series GEN II NiR
- C-187 Transfer Grey Heat Dissipation
- W-400 Glacier Chrome

- See Page 9 -

ELITE SERIES

We've Taken H-Series To The Next Level.

WHY CHOOSE ELITE?

- **Increased** Abrasion, Corrosion and Chemical Resistance
- **Very Low** Coefficient Of Friction, Rivaling Teflon®
- **Engineered** For A Distinctive High-End Look and Feel



Cerakote Elite Series is available in 9 modern, earth-tone colors that can be mixed or patterned to create custom, high-performance finishes.

| | | | | | | | | |
|----------------|----------------|-------------|----------------|--------------|-------------|------------|----------------------|---------------|
| E-100 Blackout | E-110 Midnight | E-120 Smoke | E-160 Concrete | E-140 Jungle | E-130 Earth | E-150 Sand | E-170 Coyote M17 Tan | E-190 "20150" |
|----------------|----------------|-------------|----------------|--------------|-------------|------------|----------------------|---------------|

Technical & Performance Data

- | | |
|---|---|
| • Theoretical Solids by Weight..... 42.5 +/- 2% | • ASTM D3363 Exceeds 9h scratch and gouge hardness |
| • Theoretical Coverage per Gallon at 1.0 mil..... 680 ft ² | • ASTM D4060 Taber abrasion greater than 8000 wear cycles per mil |
| • Viscosity (Brookfield Viscometer)..... ~45 cP | • ASTM B117 Corrosion resistance more than 3000 hours |
| • Recommended Film Thickness 0.5-1.0 mil (Max up to 2 mils) | • ASTM D2794 Direct and indirect impact resistance of 160 in-lbs. |
| • Adhesion Cross-Cut Tape (ASTM D3359)..... 5B | • ASTM D522 0mm coating loss at 180° mandrel bend |
| • Impact (ASTM 2794)..... 160/160 inch/lbs. | |
| • Mandrel Bend (ASTM D522)..... 0mm loss @ 180° Rotation | |
| • Liquid Density (g/mL) 1.40 | |
| • Gloss Level..... Matte, 7-10 Gloss Units | |

H-SERIES

The Unrivaled Leader In Thin Film Protective Coatings.

WHY CHOOSE H-SERIES?

- **Superior** Corrosion, Wear, Impact, Scratch and Chemical Resistance
- **Maximum** Hardness, Durability, Flexibility and Adhesion
- **Excellent** Sprayability, Coverage and Consistency



THE INDUSTRY LEADER



OVER 100 COLORS



Technical & Performance Data

- Theoretical Solids by Weight..... 30 - 60%
- Theoretical Coverage per Gallon at 1.0 mil..... 480 - 960 ft²
- Viscosity (Brookfield Viscometer)..... 60 - 120 cP
- Recommended Film Thickness 1.0 mil
- Adhesion Cross-Cut Tape (ASTM D3359)..... 5B
- Impact (ASTM 2794)..... 160/160 inch/lbs.
- Mandrel Bend (ASTM D522)..... 0mm loss @ 180° Rotation
- Liquid Density (g/mL) 1.36 - 1.45

Recommended for any application requiring a tough, thin and durable finish including but not limited to:

- Firearms
- Tools
- Consumer electronics
- Eyewear
- Travel cups/mugs
- Knives
- Valves
- Salt water applications
- Wearables
- And more

HIGH TEMPERATURE

The Thinnest, Most Durable High Temperature Ceramic Coatings In The World.

Unsurpassed. No other word can adequately describe the Cerakote line of high temperature ceramic coatings. Formulated to withstand temperatures up to 2,000 degrees Fahrenheit, the Cerakote high temperature ceramic coatings outperform all other high temperature coatings in the most extreme environments.

The Cerakote High Temperature Coatings Advantage:

- Better thermal barrier properties than any other high temperature coatings.
- Industry leading heated and un-heated corrosion resistance.
- Withstands thermal shock without degrading or losing color.
- Extremely high chemical resistance (specific chemical performance available by request).
- VOC exempt in all 50 states.

Industry Leading Attributes:

- Ultra smooth, sleek, rich finish
- Easy single coat application
- Air and oven cured options
- Excellent coverage
- Self-leveling

Recommended for high temperature applications including the following:

- Automotive Components
- Exhaust & Headers
- Aluminum Wheels
- Brakes & Calipers
- Turbos & Manifolds
- Full Auto Barrels
- Suppressors
- Muzzle Brakes
- Industrial Gas & Oil
- Heat Exchangers
- And more

Technical & Performance Data

- Adhesion (ASTM D3359)..... 5B (Excellent)
- Theoretical Solids by Weight..... 45-75%
- Theoretical Coverage per Gallon at 1.0 mil..... 300-700ft²
- Viscosity (Brookfield Viscometer)..... 20-200 cP
- Recommended Film Thickness 1.0 mil
(Max up to 2 mils)
- Impact (ASTM 2794)..... 72/20 to 100/40 inch/lbs.
- Mandrel Bend (ASTM D522)..... 2 mm @ 180° Rotation
- Salt Spray (ASTM B117)..... 515 - 1051 Hours
(5% Salt Concentration @ 95°F)
- Liquid Density (g/mL)..... 1.26 - 1.47

GEN II NiR

The Next Generation Of Visual And Near-Infrared Signature Management Coatings



STANDARD FINISH



CERAKOTE® Gen II

Which Rifle Would You Choose?

Camouflage For Day And Night™

Cerakote Gen II Coatings* are the next generation of firearm coatings developed specifically for military small arms and crew-served weapon applications where a capability is needed to manage the visual and near-infrared signature (not thermal) while at the same time enhancing durability, reliability and maintainability. In addition to the signature management capability of night optical devices, Cerakote Gen II offers superior wear and corrosion resistance under a wide variety of adverse environmental conditions likely to be encountered in all theaters of operation.

Cerakote Gen II is designed to conform to the NIR reflectivity standards outlined in United States Military Specification MIL-C-53039D, MIL-DTL-44436, as well as Australian Defense Standard DEF(AUST) 8746.

*NIC Industries restricts the sale of Gen II coatings to military and law enforcement agencies only.

See product testing at Cerakote.com/Testing for more information.

CLEAR COATINGS

The World's Strongest Clear Coat™

All Cerakote Ceramic Clears have industry leading durability, hardness, scratch resistance, flexibility and chemical resistance. Cerakote Clears have been designed specifically to be the thinnest, yet strongest, clear coating on the market and can be applied to nearly any substrate, from Hydrographics and Composites, to Metals and Plastics.

Product Attributes

| APPLICATION SUITABILITY | MC-156 | MC-157 | MC-160 | MC-161 | H-300 | H-301 |
|---------------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------|-------------------------|
| METALS | Good | Good | Good | Good | Excellent | Excellent |
| HYDROGRAPHICS | N/A | N/A | Excellent | Excellent | N/A | N/A |
| COMPOSITES AND FIBERGLASS | Excellent | Excellent | Good | Good | N/A | N/A |
| PLASTICS | Excellent | Excellent | Good | Good | N/A | N/A |
| PVD | Good | Good | Excellent | Excellent | N/A | N/A |
| PRODUCT CHARACTERISTICS | | | | | | |
| GLOSS LEVEL | High Gloss | Matte | High Gloss | Matte | High Gloss | Matte |
| COMPONENTS | 1 Part Ready To Spray | 1 Part Ready To Spray | 1 Part Ready To Spray | 1 Part Ready To Spray | 2 Part With Catalyst | 2 Part With Catalyst |
| CURE METHOD | Air/Ambient | Air/Ambient | Air/Ambient | Air/Ambient | Oven/Thermal | Oven/Thermal |
| TACK FREE TIME | 40 Minutes | 40 Minutes | 40 Minutes | 40 Minutes | N/A | N/A |
| CHEMICAL RESISTANCE | Excellent | Excellent | Good | Good | Excellent | Excellent |
| WEATHERABILITY | Excellent | Excellent | Excellent | Excellent | Fair | Fair |
| TEMPERATURE STABILITY | 1000°F | 1000°F | 500°F | 500°F | 400°F | 400°F |
| SPRAYABILITY | Good | Good | Excellent | Excellent | Excellent | Excellent |
| RESISTANCE TO DEFECTS | Fair | Fair | Excellent | Excellent | Excellent | Excellent |

Product Specific Technical Data Sheets Are Available At ClearCoating.com

CERAKOTE.COM | 1-866-774-7628

CLEAR COATINGS

The World's Strongest Clear Coat™

Choose The Right Clear For Your Application



Clear over Hydrographics

HYDROGRAPHICS




PLASTICS




Clear over PVD

COMPOSITES

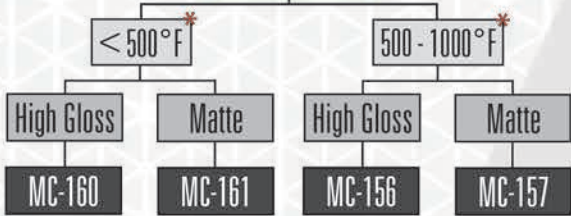


Clear over Metals

PVD

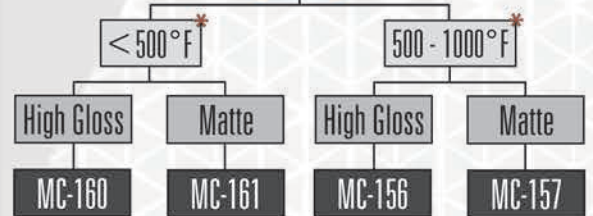

METALS

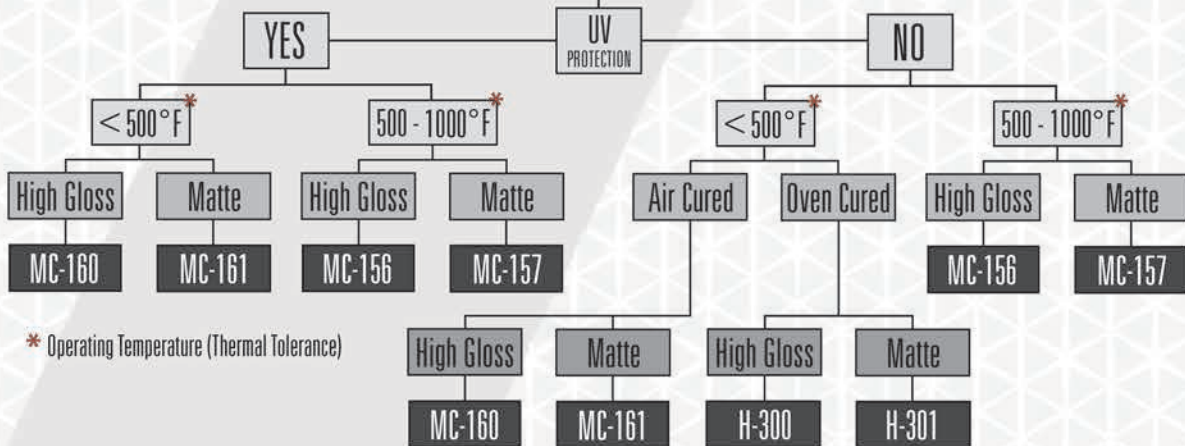

* Operating Temperature (Thermal Tolerance)

Product Specific Technical Data Sheets Are Available At ClearCoating.com

CERAKOTE.COM | 1-866-774-7628

SPECIALTY SERIES

Products Designed With Specific Performance Attributes


Each Specialty Coating has been designed with specific performance attributes and maintains the industry leading physical and chemical performance of Cerakote in a single coat, thin film coating.

H-9000

Electrical Barrier

Electrical barrier coating with a low dielectric constant

Oven Cure | Recommended Film Thickness: 1.0 mil




C-110

Micro Slick

Low coefficient of friction coating for high temperature applications

Air Cure | Recommended Film Thickness: 0.25 mils




C-186 V-136

Piston Coatings

Low thermal conductive coatings, used primarily on top of pistons, engine valves and combustion chambers to insulate and reduce heat transfer

Air & Oven Cure | Recommended Film Thickness: 1.0 mil



HIR-SERIES

GEN II NiR

Near-infrared Signature Management

Oven Cure | Recommended Film Thickness: 1.0 mil | See Page 6




C-187

Transfer Grey Heat Dissipation

High thermally conductive coatings, used primarily for radiators, intercoolers and heat exchangers

Air Cure | Recommended Film Thickness: 1.0 mil



W-400

Glacier Chrome

Polished Chrome-Like High Temperature Ceramic Coating (Chrome Free)

Air Cure | Recommended Film Thickness: 1.0 - 2.0 mils



Product Specific Technical Data Sheets Are Available At Cerakote.com & CerakoteHighTemp.com

CERAKOTE.COM | 1-866-774-7628

NOTES





CERAKOTE.COM

AN INNOVATION OF



V 1.10.18